


# Tridonic TALEXXdriver LCBU 25W 12V Basic phase-cut SR

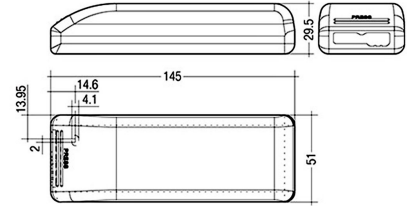

## Technical Details:

Method of Dimming:	"Triac Phasen-an-/abschnitt"
Input Current:	AC 198 - 264V, 135mA, 50/60Hz
Power Consumption:	30 W
Power Factor (PF):	>0.97
Electrical Protection Class:	II
Ambient Temperature (TA):	-20°C - 50°C

Dimensions:	145x51x30 mm
IP Class:	20
Housing Color:	white
Housing Material:	plastic
Net Weight:	117 g
Type of Packaging:	box
Weight incl. Packaging:	0.117 kg
Content Master Package:	10
Operating Hours:	50.000 h
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications:	CE, ENEC
Barcode:	9006210501673
Connection:	Terminal

Information and Downloads:

