


Lifud GIF040YS(H)900H

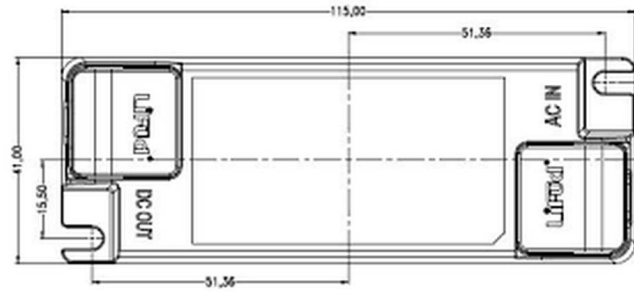

Technical Details:

Input Current:	AC 220 - 240V, 50/60Hz
Power Consumption:	36 W
Power Factor (PF):	>0.93
Input Driver:	terminal
Output of Driver:	DC 33-40V, 900mA
CC/CV:	CC
Switching Cycles:	>100.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-30°C - 50°C

Dimensions:	115x41x28 mm
IP Class:	20
Housing Color	white
Housing Material:	plastic
Net Weight:	100 g
Type of Packaging:	box
Weight incl. Packaging:	0.098 kg
Dimensions of Master Package:	390x290x210 mm
Product Line:	Advance Line
Warranty	5 years
Operating Hours:	50.000 h TC<80°C
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE,TÜV,SELV,D
Barcode:	4250557816715
Idealer Treiber für LED-Panels und -Downlights	

Information and Downloads:

