


Battery WORKLIGHT W599A

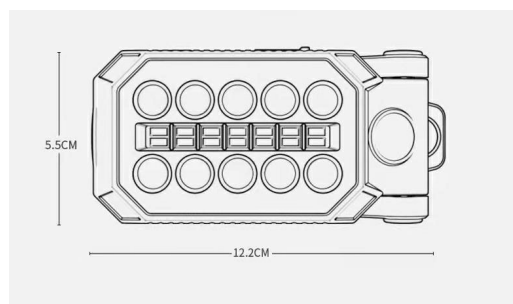

Technical Details:

Luminous Flux:	2500 lm
Light Yield:	83 lm/W
Light Temperature:	6500 K
Light Color:	cold white
Color Rendering Index:	≥80 Ra
Color Consistency (SDCM):	<6
Beam Angle:	120 °
Light Emission:	
LED-Chip:	COB
Number of LED:	25
Ignition Time:	<1 s
Input Current:	DC 5V
Power Consumption:	30 W
Input Driver:	USB
CC/CV:	CV
Input Lamp:	terminal
Switching Cycles:	>10.000
Electrical Protection Class:	II
Ambient Temperature (TA):	0°C - 40°C
Storage Temperature:	-5°C - 45°C

Dimensions:	121x61x41 mm
Mounting:	ceiling,wall,ground
Montageart:	surface mounted
Pivot Range tilt:	165 °
IP Class:	65
Housing Color	black/beige
Special Feature of Housing:	magnetic, hook
Cover:	cover
Net Weight:	219 g
Type of Packaging:	box
Dimensions of Packaging:	175x87x45
Weight incl. Packaging:	0.25 kg
Content Master Package:	60
Dimensions of Master Package:	465x33x32 mm
Weight Master Package:	16 kg
Product Line:	ECO Line
Warranty	2 years
Operating Hours:	15.000 h L80/B20
Disposal Obligation:	✓
Customs Tariff Number:	9405409990
Certifications	CE
Barcode:	4250557822051
Batterie Arbeits-/Campingleuchte	
Signal Leuchte: red/white blinkend	
Step Dimming	
magnetischer Halter, Haken, Gewinde 5mm	
18650 Li-Ion Battery, 2 x 2200mAh	

Information and Downloads:

