


Lifud AAD020-0500-42 Dali 2

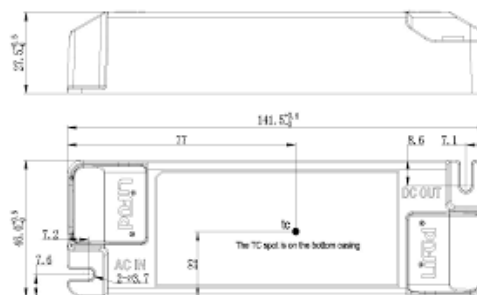

Technical Details:

Dimmable:	✓
Method of Dimming:	DALI, Push-Dim
Input Current:	AC 220 - 240V, 47/63Hz
Power Consumption:	20 W
Driver Manufacturer:	Lifud
Power Factor (PF):	>0.9
Input Driver:	terminal
Output of Driver:	DC 9-42V, 250-500mA
CC/CV:	CC
Output Current Adjustable:	✓
Switching Cycles:	>100.000
Electrical Protection Class:	II
Ambient Temperature (TA):	-20°C - 45°C
Storage Temperature:	-40°C - 60°C

Dimensions:	122x40x25 mm
Mounting:	surface mounted
IP Class:	20
Housing Color:	white
Housing Material:	plastic
Special Feature of Housing:	Selectable output current
Net Weight:	85 g
Type of Packaging:	none
Weight incl. Packaging:	0.085 kg
Content Master Package:	84
Dimensions of Master Package:	390x290x210 mm
Weight Master Package:	8,2 kg
Product Line:	Advance Line
Warranty:	5 years
Operating Hours:	50.000 h TC<80°C
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications:	CE, TÜV, ENEC, SELV
Barcode:	4250557822211
ideal für Panels und Downlights	
Current select: 250, 300, 350, 400, 450, 500	

Information and Downloads:

