
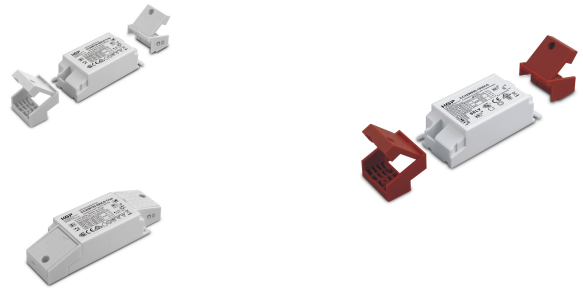


LED-Driver für Panel und Downlights

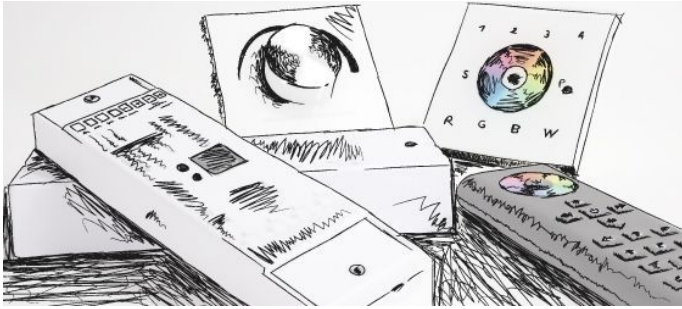

Product information "LED-Driver für Panel und Downlights"

Universal LED driver for downlights and panels

- Universal LED ballast for flush-mounting and surface-mounting (optional strain reliefs must be ordered as surface-mounting variant, see accessories).
- Adjustable output current: 500, 600, 650, 700mA max. 30W
- Flicker-free

Technical Details:

Power Consumption:	30 W
Power Factor (PF):	0.92
Ambient Temperature (TA):	-10°C bis +45°C
Housing Material:	plastic
Housing Color	white
Dimensions	98x44x26 mm
Net Weight:	86 g

Information and Downloads:

