
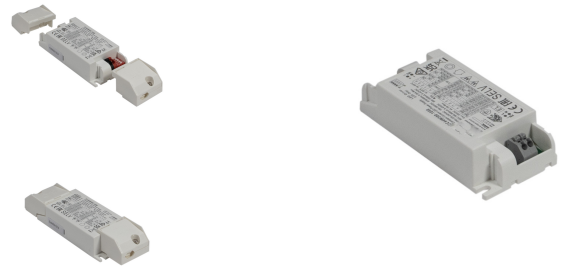


Kompakter Driver für Panel und Downlights

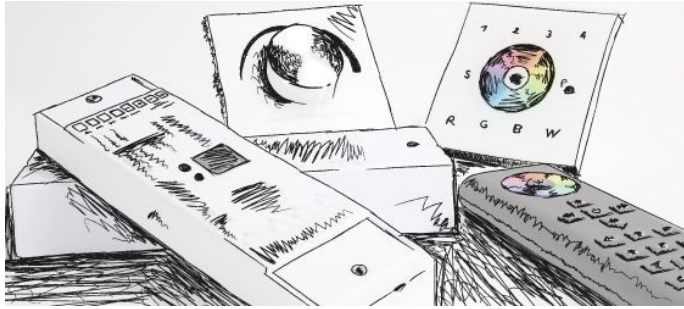

Product information "Kompakter Driver für Panel und Downlights"

Universal LED driver for downlights and panels

- Power select: variable output current in 4 steps selectable: 700-1050mA
- max. 44W
- version for build into luminaires without cable holder boxes
- flickerfree

Technical Details:

Power Consumption:	44 W
Power Factor (PF):	0.92
Ambient Temperature (TA):	-20°C - 45°C
Housing Material:	plastic
Housing Color	white
Dimensions	137,5x44x23 mm
Net Weight:	83 g
Warranty	5 years

Information and Downloads:

