


# Kompakter Driver für Panel und Downlights

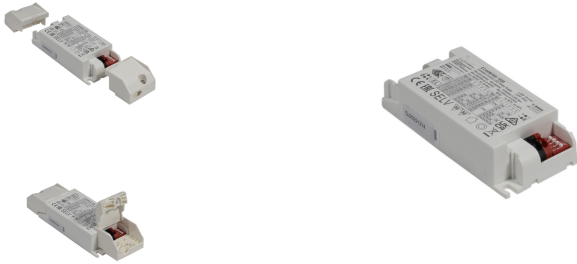

## Technical Details:

Input Current:	AC 220-240V, 260mA, 50/60Hz, DC 180-280V
Power Consumption:	44 W
Driver Manufacturer:	KGP
Power Factor (PF):	>0.92
Input Driver:	terminal
Output of Driver:	DC 9-42V, 300-1050mA
CC/CV:	CC
Output Current Adjustable:	✓
Electrical Protection Class:	II
Compatible with Emergency Current:	✓
Ambient Temperature (TA):	-10°C bis +45°C
Storage Temperature:	-10°C bis +60°C

Dimensions:	97x43,5x29 mm
Montageart:	recessed
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	ohne Zuentlastung
Net Weight:	127 g
Weight incl. Packaging:	0.125 kg
Content Master Package:	100
Dimensions of Master Package:	395x235x140 mm
Weight Master Package:	12,84 kg
Product Line:	Advance Line
Warranty	5 years
Certifications	CE,ENEC,SELV
Power Select:	320-1050mA, 50mA steps
	perfect for LED panels and downlights
	max. driver on 16A breaker: B Type: 21,C Type: 35

Information and Downloads:

