


# PICTURA Display Light 35-830/840/857-3800lm max.

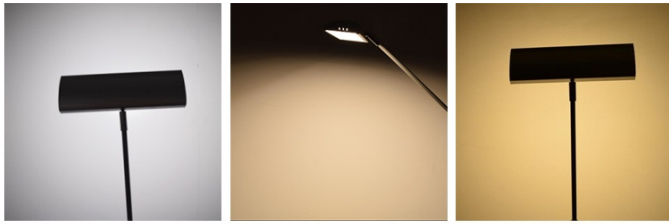

Pure white 5700K

Natural white 4000K

warm white 3000K



## Product information "PICTURA Display Light 35-830/840/857-3800lm max."

LED Display flood light

- longlasting LED display luminaire with arm
- vertical adjustable light head
- CCT select: 3000, 4000, 5700 Kelvin switchable
- IEC link connectors integrated in the base: IEC male/female C13/C14
- low power consumption just 35W and high luminous flux >3400lm
- incl. power cord Schuko to IED female 1,5m 3 x 1,5mm<sup>2</sup>
- max. 10 lamps can be daisy chained on one feed in cable.
- adjustable holder clamp
- various display adapters and accessories available

Applications:

trade show, advertisement banners, exhibition, showroom, Art

## Technical Details:

Luminous Flux	3800 lm
Light Yield:	109 lm/W
Light Temperature:	3000, 4000, 5700 K
Color Rendering Index (CRI)	≥80 Ra
Color Consistency (SDCM):	5
Power Consumption:	35 W
Power Factor (PF):	0.9
Operating Hours:	>50.000 h L80/B20
Switching Cycles:	>100.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-10°C - 40°C
Housing Material:	aluminum
Housing Color	silver
Coating:	powder-coated
Pivot Range tilt:	80 °
Dimensions	525x163x39 mm
Net Weight:	950 g
Warranty	3 years

Information and Downloads:

