


PARAFLECTA SWING Downlight 8-38-827/857-760LM IP65 front



Product information "PARAFLECTA SWING Downlight 8-38-827/857-760LM IP65 front"

Litegear ® universal Retrofit LED-Module suitable for recessed MR16 downlight fittings
One Fit all

- perfect replacement for konventional downlights with halogen MR16 GU5,3 or GU10 socket
- Tiltable design
- interchangeable bezel (not included)
- high system effcency up to 110lm/W (500-840lm)
- selectable output power 5/8W via switch (5W: 500-550lm / 8W: 740-840lm)
- CCT selectable 2700, 3000, 4000, 5700 Kelvin via switch
- Including 3 bezels: white, black, silver brushed
- beamangle: 38°
- Triac dimmable with common dimmers
- compact dimensions: 90mm Dimensions: and only 45mm high for recessed ceilings with limited space cut out: 65mm
- tool free, plugable terminal box for power loop 240V AC, perfect for replacing the driver or renovations
- Fire rated downlight: 90mins - BS476-21 (for Europe)
- IP65 waterproof from front side
- good color rendering index: CRI >80

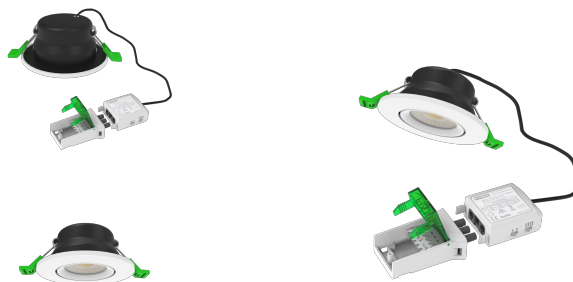

Technical Details:

Luminous Flux	760 lm
Light Yield:	95 lm/W
Light Temperature:	2700, 3000, 4000, 5700 K
Color Rendering Index (CRI)	≥80 Ra
Color Consistency (SDCM):	5
Power Consumption:	5, 8 W
Operating Hours:	>50.000 h L80/B20
Switching Cycles:	>50.000
Ignition Time:	<0,5 s
Ambient Temperature (TA):	-20°C - 45°C
Housing Material:	Aluminium/plastic
Housing Color	white
Coating:	lacquered
Pivot Range tilt:	40 °
Dimensions	90x45 mm
Cut-Out Dimensions	65-70 mm
Net Weight:	260 g
Warranty	3 years

Information and Downloads:

