


Tridonic TALEXXconverter LCA one4all Ip PRE

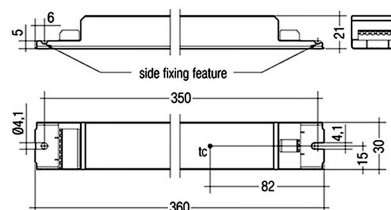

Technical Details:

| | |
|------------------------------------|---------------------------------------|
| Dimmable: | ✓ |
| Method of Dimming: | DALI, Push-Dim |
| LED-Chip: | COB |
| Input Current: | AC 198 - 264V, 50/60Hz, DC 176 - 280V |
| Power Consumption: | 57 W |
| Power Factor (PF): | >0.98 |
| Input Driver: | terminal |
| Output of Driver: | DC 48-50V |
| CC/CV: | CC |
| Output Current Adjustable: | ✓ |
| Electrical Protection Class: | I |
| Compatible with Emergency Current: | ✓ |
| Ambient Temperature (TA): | -25°C - 60°C |

| | |
|-------------------------|---------------|
| Dimensions: | 358x30x21 mm |
| Montageart: | recessed |
| IP Class: | 20 |
| Housing Color | white |
| Housing Material: | metal |
| Net Weight: | 207 g |
| Type of Packaging: | box |
| Weight incl. Packaging: | 0.256 kg |
| Content Master Package: | 10 |
| Warranty | 5 years |
| Operating Hours: | 100.000 h |
| Disposal Obligation: | ✓ |
| Customs Tariff Number: | 8504408390 |
| Certifications | CE, ENEC |
| Barcode: | 9006210522661 |
| Connection: | Klemme |

Information and Downloads:

