


LED-Driver für Panel und Downlights

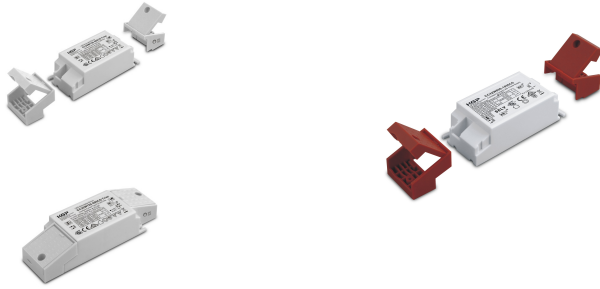

Technical Details:

Input Current:	AC 220-240V, 50/60Hz
Power Consumption:	21 W
Driver Manufacturer:	KGP
Power Factor (PF):	>0.92
Input Driver:	terminal
Output of Driver:	DC 25-42V, 250-500mA
CC/CV:	CC
Output Current Adjustable:	✓
Electrical Protection Class:	II
Ambient Temperature (TA):	-10°C bis +45°C
Storage Temperature:	-10°C bis +55°C

Dimensions:	98x44x30 mm
Montageart:	recessed
IP Class:	20
Housing Color:	white
Housing Material:	plastic
Special Feature of Housing:	ohne Zuentlastung
Net Weight:	74 g
Content Master Package:	120
Dimensions of Master Package:	453x252x200 mm
Weight Master Package:	11,29 kg
Product Line:	Advance Line
Certifications	CE,ENEC,SELV
flickerfree	
perfect for LED downlights	
Power Select: 4 steps 250-500mA	
max. driver on 16A breaker: B Type: 36,C Type: 60	

Information and Downloads:

