


Campa Flex Floodlight FL150-840-20000LM

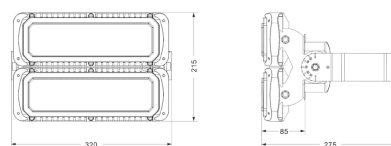

Technical Details:

| | |
|------------------------------------|-------------------------|
| Luminous Flux: | 20000 lm |
| LED Output: | 140 W |
| Light Yield: | 133 lm/W |
| Light Temperature: | 4000 K |
| Light Color: | neutralwhite |
| Color Rendering Index: | ≥80 Ra |
| Color Consistency (SDCM): | <4 |
| Beam Angle: | 90 ° |
| Unified Glare Rating (UGR): | <20 |
| LED-Chip Manufacturer: | Lumileds |
| LED-Chip: | SMD 5050 |
| Ignition Time: | <0,5 s |
| Input Current: | AC 100 - 265V, 50/60Hz |
| Power Consumption: | 150 W |
| Contains Driver: | ✓ |
| Driver Manufacturer: | Meanwell |
| Power Factor (PF): | >0.95 |
| Input Driver: | cable with flying leads |
| CC/CV: | CC |
| Input Lamp: | cable with flying leads |
| Switching Cycles: | >100.000 |
| Electrical Protection Class: | I |
| Compatible with Emergency Current: | ✓ |
| Ambient Temperature (TA): | -20°C - 45°C |
| Storage Temperature: | -40°C - 55°C |

| | |
|-----------------------------|---------------------|
| Dimensions: | 275x320x215 mm |
| Mounting: | ceiling,wall,ground |
| Montageart: | surface mounted |
| IP Class: | 66 |
| IK Code: | 10 |
| Housing Color | black |
| Housing Material: | aluminum |
| Coating: | powder-coated |
| Special Feature of Housing: | modular, swivelling |
| Cover: | frosted |
| Net Weight: | 4600 g |
| Type of Packaging: | box |
| Content Master Package: | 2 |
| Weight Master Package: | 12 kg |
| Product Line: | Advance Line |
| Warranty | 5 years |
| Operating Hours: | 100.000 h L70/B50 |
| Disposal Obligation: | ✓ |
| Customs Tariff Number: | 9405499090 |
| Certifications | CE,ENEC,LM80 |
| Barcode: | 4250557813363 |
| Akzo Nobel Beschichtung | |

Information and Downloads:



