


Tridonic EM powerBasic FX SR 50W

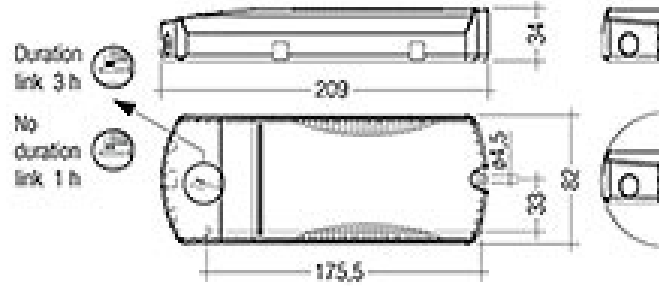

Technical Details:

Input Current:	AC 220-240VV, 110-285mA, 50/60Hz
Power Consumption:	50 W
Driver Manufacturer:	Tridonic
Power Factor (PF):	>0.95
Input Driver:	terminal
Output of Driver:	DC 15-50V, 300-1400mA
CC/CV:	CC
Output Current Adjustable:	✓
Switching Cycles:	>100.000
Electrical Protection Class:	II
Loop-Through Cabling:	✓
Ambient Temperature (TA):	-20°C - 55°C
Storage Temperature:	-20°C - 65°C

Dimensions:	209x82x34 mm
Montageart:	surface mounted
IP Class:	20
Housing Color	white
Housing Material:	plastic
Special Feature of Housing:	für Terminal Plug
Net Weight:	231 g
Type of Packaging:	box
Product Line:	Premio Line
Warranty	5 years
Operating Hours:	100.000 h
Disposal Obligation:	✓
Customs Tariff Number:	8504408390
Certifications	CE,SELV,D
Barcode:	9006210531267
Ausgangsstromanpassung über Plug 300-1400	
12-50W Ausgangsleistung (einstellbar) über Plug	
Anschluß für externes Akkupack und Status LED green	
Leistung im Batteriebetrieb ca. 3W für 3 Stunden	

Information and Downloads:

